



Mando directo
Direct Handle

Intensidad / rating	40A, 2x25A
terminal	M4
hilo rígido / stranded wire	2,5 - 10 mm ²
hilo flexible / flexible wire	2,5 - 6 mm ²

Dimensiones / Dimensions

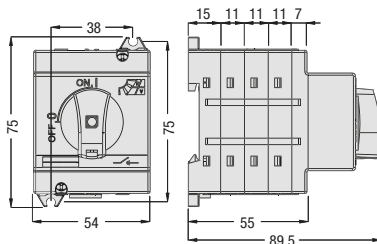


MPV514100




MPV532100

Montaje perfil DIN / DIN rail



Fijación perfil DIN
DIN rail fixing


Fondo armario / Rear mounting

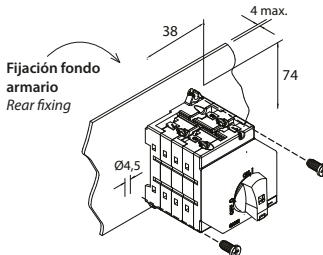



Reapretar **todos** los tornillos del embornado durante la instalación
Retighten **all** connection screws during installation



Embrague, enclavamiento y eje prolongado / Prolonged shaft and interlock

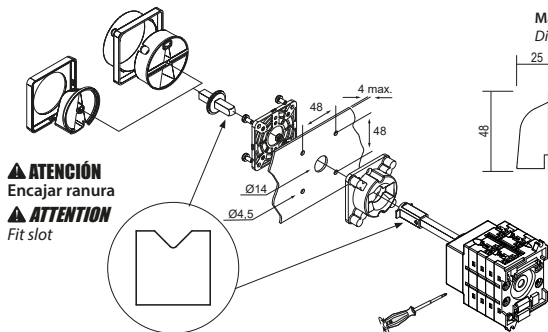

Mando exterior directo
Direct external handle

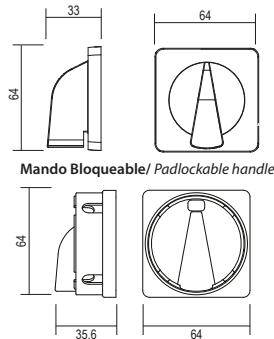

Mando Bloqueable/ Padlockable handle

⚠ PELIGRO / DANGER

TENSIÓN PELIGROSA Únicamente el personal de mantenimiento eléctrico especializado deberá instalar y prestar servicios de mantenimiento a este equipo. Cortar la alimentación del equipo antes de realizar cualquier trabajo en él. Utilice siempre un dispositivo detector de tensión adecuado para confirmar la falta de tensión en el equipo. Vuelva a colocar todos los dispositivos, las puertas y las cubiertas antes de poner el equipo en tensión. El incumplimiento de estas precauciones podrá causar la muerte o lesiones graves.

HAZARDOUS VOLTAGE This equipment must be installed and serviced only by qualified electrical personnel. Turn off all power supplying this equipment before working on or inside equipment. Always use a properly rated voltage sensing device to confirm power is off. Replace all devices, doors, and covers before turning on power to this equipment. Failure to follow these instructions will result in death or serious injury.