

## CA024200P

ENCLOSED AUTOMATIC TRANSFER SEÑALIZACIÓN 4P 2000A SURGE PROTECTION



<b>Code</b>	007CA024200P
<b>EAN</b>	8430892214520

### Product description

Automatic transfer panel 4P 2000A with signaling synoptic panel. Transfer control logic by means of voltage supervision relays and modular timers that are easy to adjust and program. Enclosure size 2200x1000x1000 in sheet metal and protective paint treatment against corrosion color RAL7035 and IP55 protection degree. Incoming of the supply sources through the bottom of the enclosure and connection to a busbar linked with bottom of the switch. Output to load through the lower part of the assembly through a busbar system connected to the upper part of the switch. Connections at double output busbars 100x10. Busbar connection for each phase for 4 cables (2 per busbar output) of 300mm, M16 terminal connection. Front panel with synoptic with pilot lights indicating inline supply source and/or anomalies. Local manual emergency operation. Transparent protection screen against accidental contacts. Control terminals for generator start/stop 0.5-2.5mm<sup>2</sup>. Electronics protected against surge overvoltage with Class II protector In=20kA I<sub>max</sub>=40kA

**Logistic data**

---

Customs code	85371098
--------------	----------

---

**Technical data**


---

Thermal rating (I <sub>th</sub> )	2000 A
Impulse voltage (U <sub>imp</sub> )	12 kV
Maximum Cu cable cross-section	2x 2x300 mm <sup>2</sup>
Maximum Cu busbar width	2x 100x10 mm
Standard	IEC 61439-2
Transfer type	R-G

---

## Connection

---

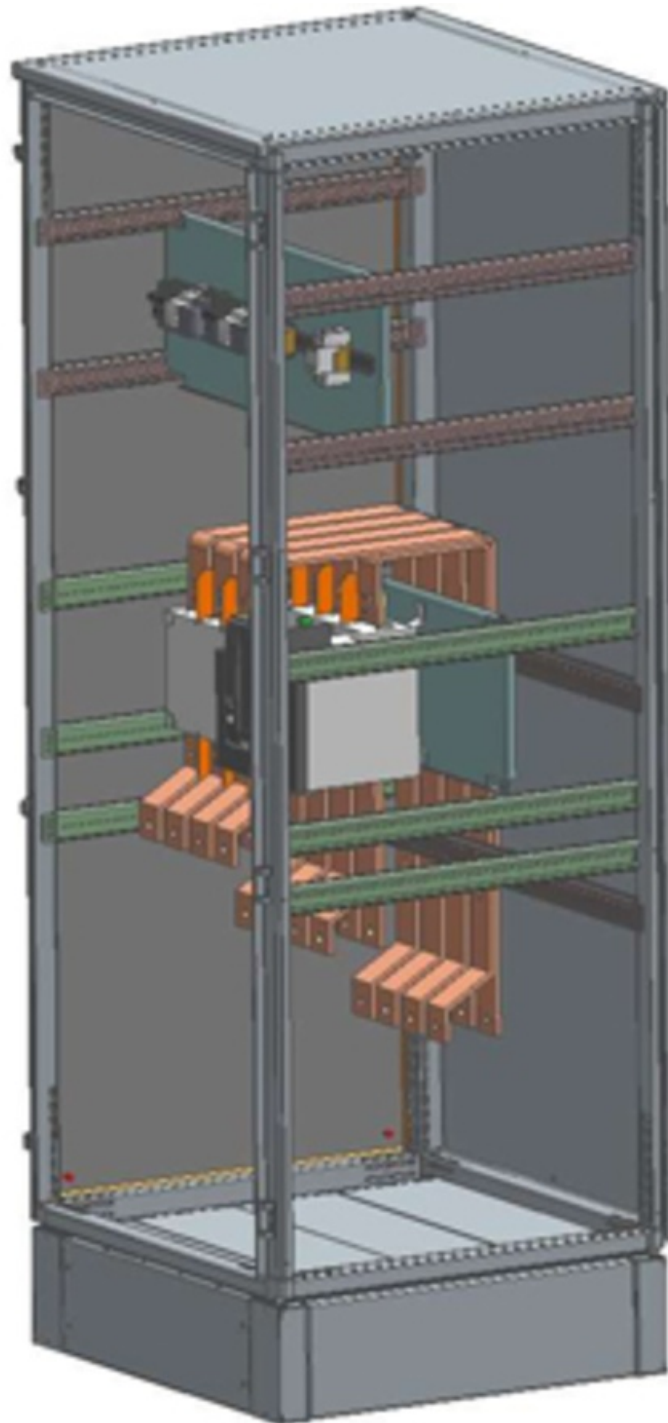

## Dimensions

---

