

## AC551A100

ON-OFF SWITCH 2P.160A.D3 PADLOCKABLE HANDLE BLACK/GREY

<b>Code</b>	009AC551A100
<b>EAN</b>	8430892171564

---

**Product description**

Padlockable on-off switch disconnecter, IP20 with black handle/grey front plate 64x64 for panel fixing. 2 poles 160A. Size D3. Ergonomic screwless quick-mount handle. Cable lug terminal connection for 70 mm<sup>2</sup> cable. Compatible with multiple accessories from the A5 series.

---

## Logistic data

Customs code	85365080
ETIM code	EC000216
Package units	1

## Technical data

Poles	2
Operational rating (I <sub>e</sub> )	160 A
Thermal rating (I <sub>th</sub> )	160 A
Wire section flexible	70 mm <sup>2</sup>
Connection screws	M8

Terminal



Max. fuse protection (gG/aM)	160 A (415 V)
	160 A (500 V)

Conditional shortcircuit current (I <sub>cc</sub> )	8 kA (415 V)
	8 kA (500 V)

Insulating voltage (V~)	690
-------------------------	-----

Insulating voltage (V...)	600
---------------------------	-----

Dummy AC-21A	45 kW (3x230 V)
	90 kW (3x415 V)
	110 kW (3x500 V)


Mixed load AC-22A	45 kW (3x230 V)
	90 kW (3x415 V)
	90 kW (3x500 V)

Motor load AC-23A	45 kW (3x230 V)
	75 kW (3x415 V)

Standard	IEC 60947-3
----------	-------------

Handle type	Bloqueable candados
-------------	---------------------

## Connection

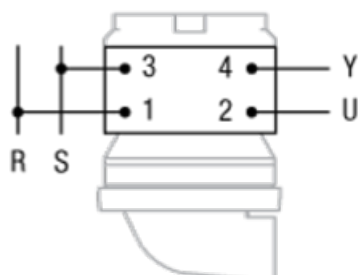

## Dimensions

