

AB5533108H

SWITCH DISCONNECTOR 4P 32A S1 IP69K PADLOCKABLE HANDLE IN ALUMINIUM ENCLOSURE



Code

009AB5533108H

Product description

IP69K 4-pole 32A safety switch in aluminium enclosure. Enclosure 3AL in aluminium painted in grey color RAL7032 with surface coating to protect against corrosion, dimensions 160x160x90. Threaded M32 holes, one on top and one on bottom. Fixing to the surface by 4 points. Red / Yellow padlockable handle (up to 4 padlocks of 8 mm diameter). Connection with cage terminals for 6-16mm² cable.


Dimensions

Product height	160
Product width	160
Product length	90


Logistic data

Customs code	85365080
--------------	----------

Technical data

Poles	4
Operational rating (Ie)	32 A
Thermal rating (Ith)	40 A
Wire section (AWG)	6
Wire section rigid	6 - 25 mm ²
Wire section flexible	6 - 16 mm ²
Tightening torque	2 Nm
Connection screws	M5
Terminal	
Max. fuse protection (gG/aM)	40/32 A (415 V) 40/32 A (500 V)
Conditional shortcircuit current (Icc)	6 kA (415 V) 6 kA (500 V)
Insulating voltage (V~)	690
Insulating voltage (V...)	600
Dummy AC-21A	11 kW (3x230 V) 18,5 kW (3x415 V) 22 kW (3x500 V)
Mixed load AC-22A	7,5 kW (3x230 V) 15 kW (3x415 V) 18,5 kW (3x500 V)
Motor load AC-23A	5,5 kW (3x230 V) 11 kW (3x415 V) 15 kW (3x500 V)
UL Electric characteristics	2 hp 1-fase (110-120 V) 3 hp 1-fase (220-240 V) 7,5 hp 3-fase (220-240 V) 10 hp 3-fase (380-415 V) 10 hp 3-fase (440-480 V) 15 hp 3-fase (550-600 V)
Standard	IEC 60947-3 UL 508
Enclosure type	ALUMINIUM

Connection

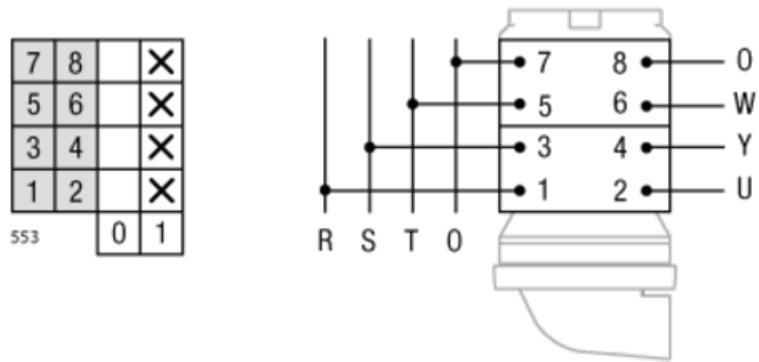

Dimensions

