

## AB553B107

ON-OFF SWITCH DISCONNECTOR 4P.200A. ENCLOSED IP65 PADLOCKABLE RED/YELLOW



**Code**

009AB553B107

**EAN**

8430892163514

**Product description**

4-pole 200A safety switch in IP65 enclosure. E2 sheet steel enclosure suitable for indoor or outdoor use in RAL7035 grey color, dimensions 250x300x200. High impact resistance IK10. Base mounted switch with extended shaft and interlock in closed position. Red / yellow padlockable handle (up to 4 padlocks of 8mm diameter). Earthing terminal. Cable lug terminal connection for 90 mm<sup>2</sup> cable

---


## Logistic data

Customs code	85365080
ETIM code	EC000216
Package units	1
Product gross weight (kg)	7

## Technical data

Poles	4
Operational rating (Ie)	200 A
Thermal rating (Ith)	200 A
Wire section flexible	95 mm <sup>2</sup>
Connection screws	M8

Terminal



Max. fuse protection (gG/aM)	200 A (415 V)
	200 A (500 V)

Conditional shortcircuit current (Icc)	8 kA (415 V)
	8 kA (500 V)

Insulating voltage (V~)	690
-------------------------	-----

Insulating voltage (V...)	600
---------------------------	-----

Dummy AC-21A	55 kW (3x230 V)
	110 kW (3x415 V)
	132 kW (3x500 V)


Mixed load AC-22A	55 kW (3x230 V)
	110 kW (3x415 V)
	110 kW (3x 500 V)

Motor load AC-23A	55 kW (3x230 V)
	90 kW (3x415 V)

Standard	IEC 60947-3
----------	-------------

Enclosure type	METAL
----------------	-------

## Connection

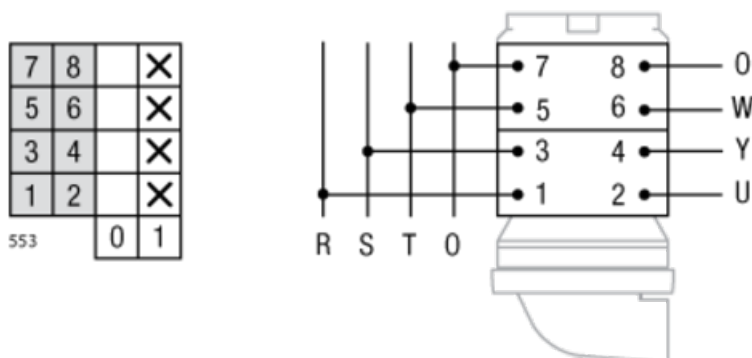

**Dimensions**

---

