

## AC5523109H

SWITCH DISCONNECTOR 3P.32A. IP69K PADLOCKABLE HANDLE IN INOX ENCLOSURE



<b>Code</b>	009AC5523109H
<b>EAN</b>	8430892316217

**Product description**

IP69K 3-pole 32A safety switch in IP65 stainless steel enclosure. 2IN enclosure in 316L stainless steel with electropolished finish suitable for highly corrosive environments or applications with hygienic requirements, dimensions 150x150x90. Upper inlet and lower outlet M32 holes. Fixing to the surface by 4 points. Black / grey padlockable handle (up to 2 padlocks of 8mm diameter). Connection with cage terminals for 6-16 mm<sup>2</sup> cable. IP66 cable glands and plugs as accessories.

## Logistic data

---

Customs code 85365080

---

## Technical data

---

Poles	3
Operational rating (Ie)	32 A
Thermal rating (Ith)	40 A
Wire section (AWG)	6
Wire section rigid	6 - 25 mm <sup>2</sup>
Wire section flexible	6 - 16 mm <sup>2</sup>
Tightening torque	2 Nm
Connection screws	M5

### Terminal




---

40/32 A (415 V)

Max. fuse protection (gG/aM) 40/32 A (500 V)

---

6 kA (415 V)

Conditional shortcircuit current (Icc) 6 kA (500 V)

---

Insulating voltage (V~) 690

Insulating voltage (V...) 600

---

11 kW (3x230 V)

Dummy AC-21A 18,5 kW (3x415 V)

22 kW (3x500 V)

---

7,5 kW (3x230 V)

Mixed load AC-22A 15 kW (3x415 V)

18,5 kW (3x500 V)

---

5,5 kW (3x230 V)

Motor load AC-23A 11 kW (3x415 V)

15 kW (3x500 V)

---

2 hp 1-fase (110-120 V)

3 hp 1-fase (220-240 V)

7,5 hp 3-fase (220-240 V)

UL Electric characteristics 10 hp 3-fase (380-415 V)

10 hp 3-fase (440-480 V)

15 hp 3-fase (550-600 V)

---


Standard IEC 60947-3 / UL 508

Enclosure type INOX

producte.Impact I K IK10

---

Connection

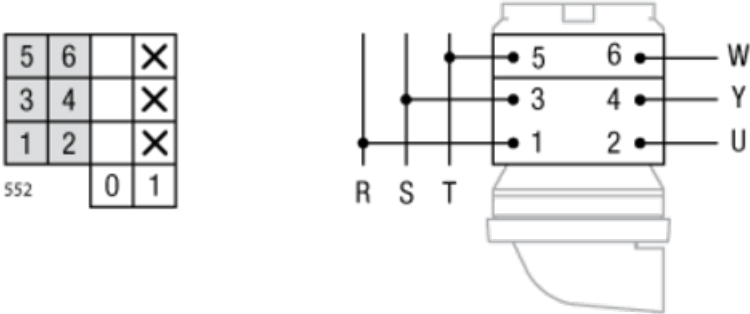

Dimensions

