

## AC5564109H

SWITCH DISCONNECTOR 6P.40A. IP69K PADLOCKABLE HANDLE IN INOX ENCLOSURE



**Code**

009AC5564109H

**EAN**

8430892316347

---

## Logistic data

---

Customs code 85365080

---

## Technical data

---

|                         |                        |
|-------------------------|------------------------|
| Poles                   | 6                      |
| Operational rating (Ie) | 40 A                   |
| Thermal rating (Ith)    | 40 A                   |
| Wire section (AWG)      | 6                      |
| Wire section rigid      | 6 - 25 mm <sup>2</sup> |
| Wire section flexible   | 6 - 16 mm <sup>2</sup> |
| Tightening torque       | 2 Nm                   |
| Connection screws       | M5                     |


---

Terminal



|  |                           |
|--|---------------------------|
| Max. fuse protection (gG/aM)           | 40/32 A (415 V)           |
|  | 40/32 A (500 V)           |
| Conditional shortcircuit current (Icc) | 6 kA (415 V)              |
|  | 6 kA (500 V)              |
| Insulating voltage (V~)                | 690                       |
| Insulating voltage (V...)              | 600                       |
| Dummy AC-21A                           | 15 kW (3x230 V)           |
|  | 22 kW (3x415 V)           |
|  | 30 kW (3x500 V)           |
| Mixed load AC-22A                      | 11 kW (3x230 V)           |
|  | 22 kW (3x415 V)           |
|  | 22 kW (3x500 V)           |
| Motor load AC-23A                      | 11 kW (3x230 V)           |
|  | 18,5 kW (3x415 V)         |
|  | 22 kW (3x500 V)           |
| UL Electric characteristics            | 2 hp 1-fase (110-120 V)   |
|  | 5 hp 1-fase (220-240 V)   |
|  | 7,5 hp 3-fase (220-240 V) |
|  | 10 hp 3-fase (380-415 V)  |
|  | 15 hp 3-fase (440-480 V)  |
|  | 20 hp 3-fase (550-600 V)  |
| Standard                               | IEC 60947-3 / UL 508      |
| Enclosure type                         | INOX                      |
| producte.Impact I K                    | IK10                      |

Connection

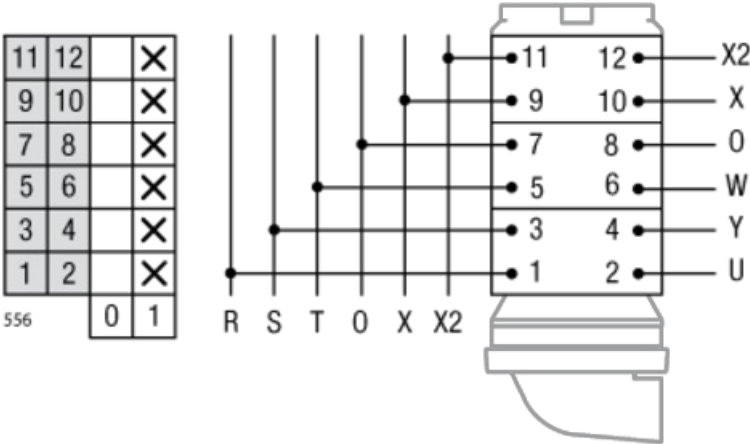

Dimensions

