

MPV532100




Code	024MPV532100
EAN	8430892303101

Technical data

Operational rating (Ie)	2 x 25 A
Impulse voltage (Uimp)	8 kV
Wire section rigid	10 mm ²
Wire section flexible	6 mm ²
Tightening torque	1,2 Nm
Connection screws	M4
Rated short-time withstand current 1s (Icw)	500 A

Connection

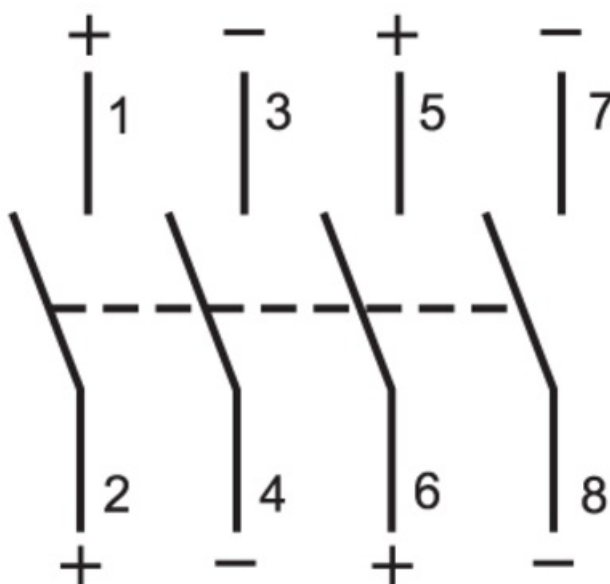

Dimensions

