


## MV553B3-0

SWITCH-DISCONNECTOR 4P M5 D.3 160A

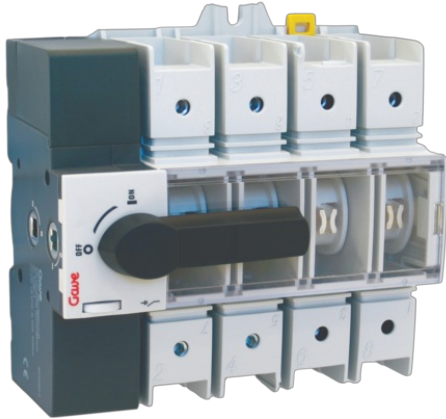

<b>Code</b>	024MV553B3-0
<b>EAN</b>	8430892197427
<b>Product description</b>	Modular switch disconnector 4P 160A MV series. Basic unit (without handle) DIN rail fixing or base mounting. Compatible with modular boxes. Visible contacts and fully apparent breaking indication. Dimensions 124x135x64. Connection by cage terminal 10-70 mm <sup>2</sup> . Multiple accessory possibilities.

**Technical data**

Thermal rating (Ith)	160 A
Impulse voltage (Uimp)	8 kV
Tightening torque	4 Nm
Cable section (min-max)	10 - 70
Conditional shortcircuit current (Icc)	12 kA
Rated operational voltage (Ue V~)	690
Max. protection fuse (gG) In	160 A
Rated short-time withstand current 0,3s (Icw)	7 A
Operational rating AC21	160 A (415 V)
	160 A (500 V)
	160 A (690 V)
Operational rating AC22	160 A (415 V)
	125 A -AC 22 A- (500 V)
	160 A -AC 22 B- (500 V)
	100 A -AC 22 A- (690 V)
Operational rating AC23	160 A -AC 22 B- (690 V)
	125 A -AC 23 A- (415 V)
	160 A -AC 23 B- (415 V)
	100 A (500 V)
Standard	180 A (690 V)
	IEC 60947-3

**Dimensions**

