


67120250

NH FUSE WITH INDICATOR 250A.GG S1

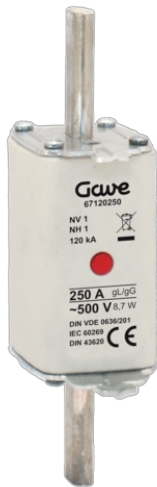

| | |
|-------------|---------------|
| Code | 01867120250 |
| EAN | 8430892109970 |

Product description

NH blade fuse size 1 Nominal current 250A with protection curve GG class. Suitable for the protection of lines or equipment for tensions up to 500V offers a high selectivity in the protection against overload and a 120KA rupture capacity in short-circuit protection. Ceramic highly resistant to thermal shocks and pressure. Copper contacts with silver bath and specially for easy introduction into the fuse base. Central melting indicator For quick visualization of the fuse status, spikelet explorer of the stainless steel indicator reverses more reliability when avoiding corrosion and aging problems.



Fuse data

| | |
|----------------------|---------------|
| Fuse type | NH |
| Operating voltage | 500 V |
| Utilisation category | gG |
| Breaking capacity | 120 kA |
| Fuse indicator | Si / Yes |
| Standards | IEC 60269-1/2 |

Technical data

| | |
|----------|-------------|
| Standard | IEC 60269-2 |
| Size | 1 |

Características Fusible

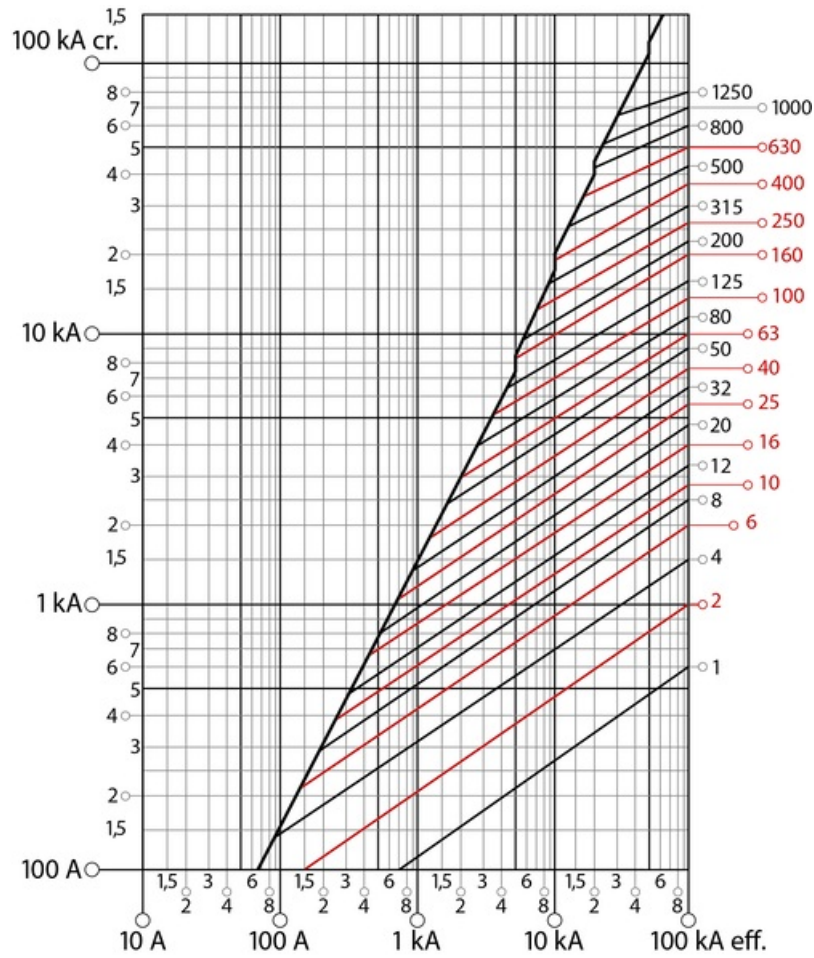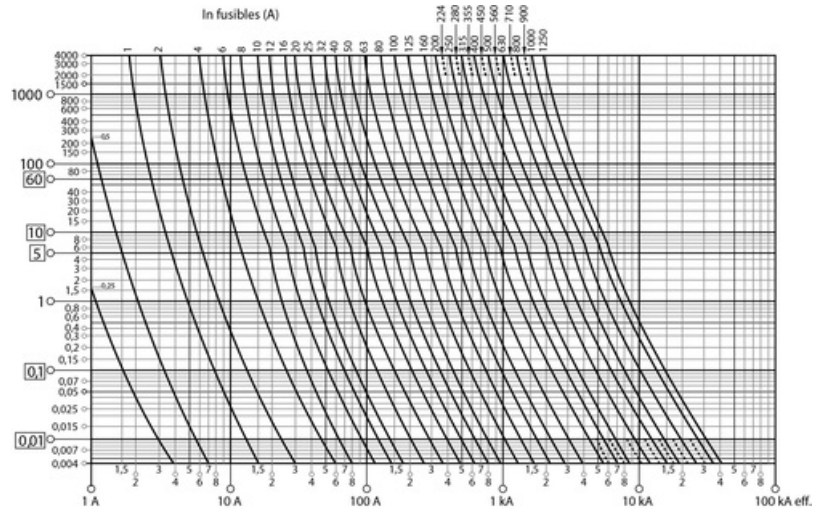

Dimensions

