

## 67220250

NH FUSE WITH INDICATOR 250A.GG S2



<b>Code</b>	01867220250
<b>EAN</b>	8430892110099

### Product description

NH blade fuse of compact dimensions size 2 Nominal current of 250A with GG class protection curve. Suitable for the protection of lines or equipment for tensions up to 500V offers a high selectivity in the protection against overload and a 120KA rupture capacity in short-circuit protection. Ceramic highly resistant to thermal shocks and pressure. Copper contacts with silver bath and specially for easy introduction into the fuse base. Central melting indicator For quick visualization of the fuse status, spikelet explorer of the stainless steel indicator reverses more reliability when avoiding corrosion and aging problems.

**Fuse data**

---



Fuse type	NH
Operating voltage	500 V
Utilisation category	gG
Breaking capacity	120 kA
Fuse indicator	Si / Yes
Standards	IEC 60269-1/2

**Technical data**

---

Standard	IEC 60269-2
Size	2C

### Características Fusible

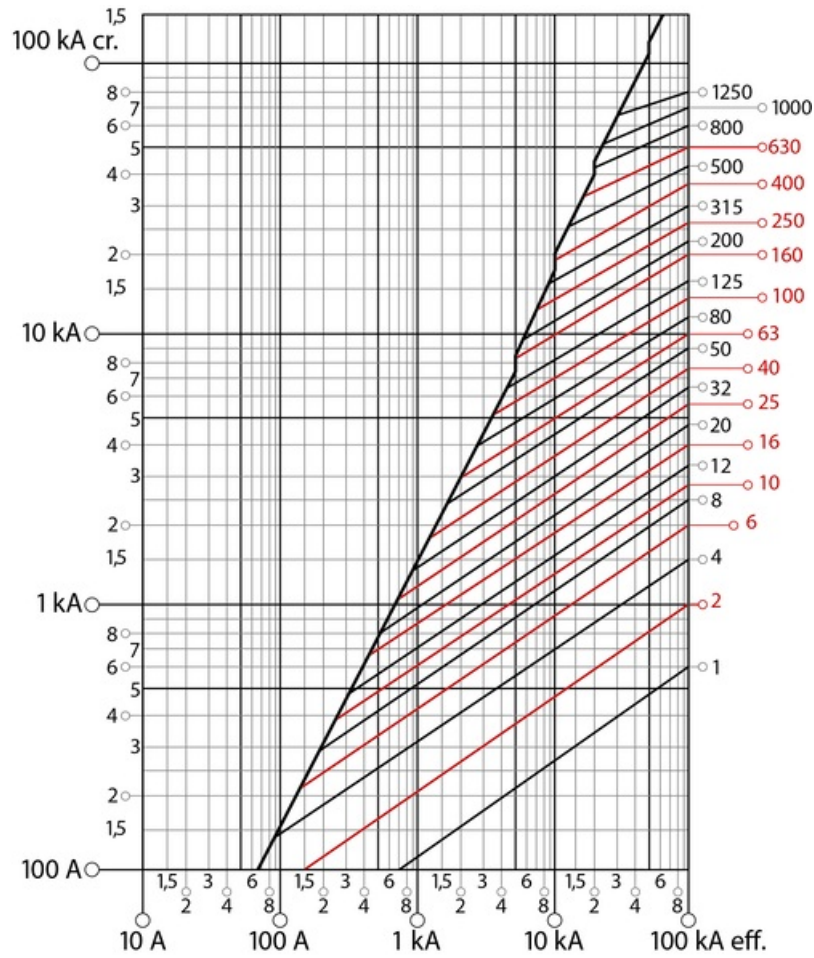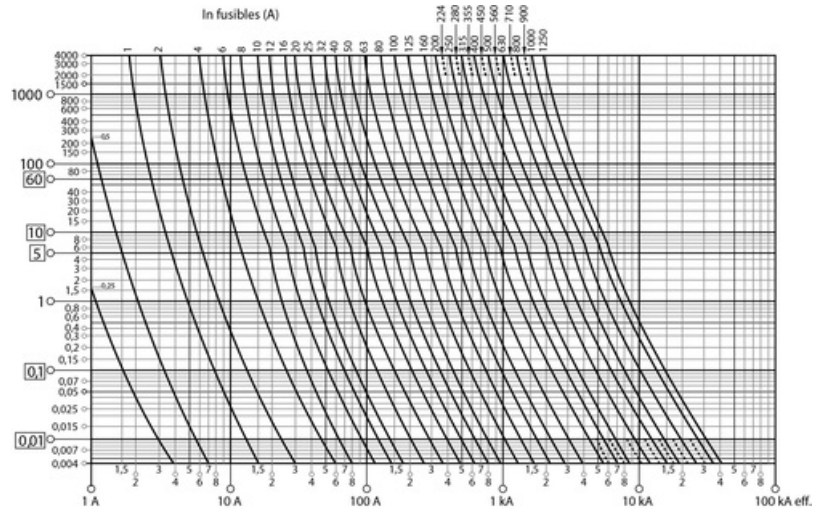

## Dimensions

---

