


LK1720006

PROLONGUED SHAFT + INTERLOCK

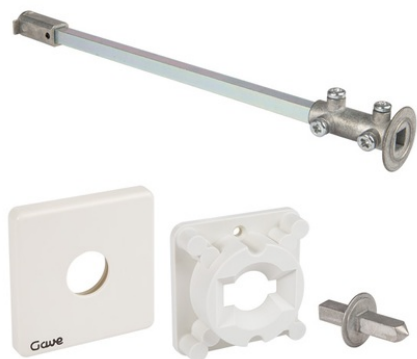

Code	009LK1720006
EAN	8430892223102

Logistic data

Customs code	85389099
ETIM code	EC000916
Package units	1
Product gross weight (kg)	0.24
Package height (mm)	30
Package width (mm)	270
Package length (mm)	120

Technical data

Operational rating (Ie)	250 A
Thermal rating (Ith)	250 A
Wire section flexible	120 mm ²
Connection screws	M8

Terminal



Max. fuse protection (gG/aM)	250 A (415 V)
	250 A (500 V)
Conditional shortcircuit current (Icc)	8 kA (415 V)
	8 kA (500 V)
Insulating voltage (V~)	690
Insulating voltage (V...)	600
Dummy AC-21A	75 kW (3x230 V)
	132 kW (3x415 V)
	160 kW (3x500 V)
Mixed load AC-22A	75 kW (3x230 V)
	132 kW (3x415 V)
	132 kW (3x500 V)
Motor load AC-23A	75 kW (3x230 V)
	110 kW (3x415 V)
Standard	IEC 60947-3