

TA211

TA 211 220-240 V AC 50/60Hz



Code	014TA211
EAN	8430892312127



Product description

Analogue daily cycle time switch with ON/OFF programming, three module wide, 220-240V AC 50/60Hz power supply, one CO contact, switching capacity 15A (resistive load) and 4A (inductive load $\cos\phi$ 0.6), minimum switching time 30 minutes, flap programming, switch for manual control with three positions: automatic, OFF and permanent ON, 150 hours of power reserve, battery interchangeable, DIN rail mounting, cage terminal connection up to 4mm², power consumption 1,5 VA, IP20 protection.

Time switches

Supply	220-240 V
Nominal frequency	50-60Hz
Power consumption	1,5 VA
Channel	1
Operating temperature	-10°C +50°C
Degree of protection	IP20
Minimum switching time	30 min
Max. wire cross section	4 mm ²
Net weight (gr)	145
Breaking capacity	Resistive load 3500 W
	Load incandescent bulb 1000 W
	Inductive load Cos =0,6 4A
Type of contact	CO
Power reserve	150 h
Connection	screw terminal
Cycle	24 hours

Connection

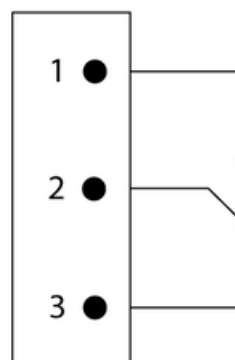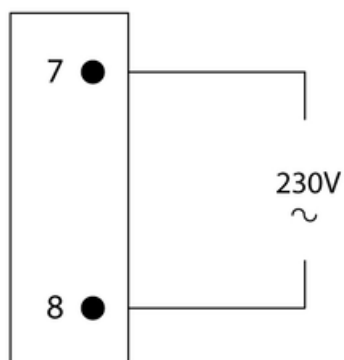

Dimensions

