

## ACVT32RS

EV CHARGING POINT MODULAR BOX 3P+N 32A RU+POP+SPD+SCHUKO



<b>Code</b>	030ACVT32RS
<b>EAN</b>	8430892352697

**Product description**

EV Charger Modular combiner box with mcb, rccb and overvoltage protection.

Modular circuit breaker 3 poles + neutral 32A C curve breaking capacity 6kA - EN 60898-1. Permanent overvoltage and undervoltage protection with automatic reclosing.

Residual current circuit breaker four pole type A sensitivity 30mA for alternating current with pulsed direct current, protected against nuisance tripping 0,25kA, EN 61008-1.

Overvoltage protection Class II In 20kA I<sub>max</sub> 40kA U<sub>p</sub> 1,5kV EN 61643-11.


The equipment includes a socket 1P+N 16A protected with MCB 16A.

Double insulation Class II box in polycarbonate material for indoor and outdoor use with high impact resistance (IK08). Dimensions de 286x418x148mm.

## Combiner box technical data

MCB - Circuit breaker	32 A
Curve	C
Breaking capacity EN 60898-1	6 kA
RCCB type	A
Combiner type	AC
Inverter AC output	3P+N
Voltage	415 V AC
Surge protector	Class II
Diferential type	30mA
Incoming current rating	32 A
Surge protector code	PSTC40
Surge protector type	II
Nominal discharge current (In)	20 kA
Maximum discharge current (Imax)	40 kA
Protection level at In (Up)	2 kV
Ingress protection IP	IP65 - IEC 60529
Impact protection IK	IK08 - IEC 62262
Standards	IEC EN 6143-1/2

## Diagrams

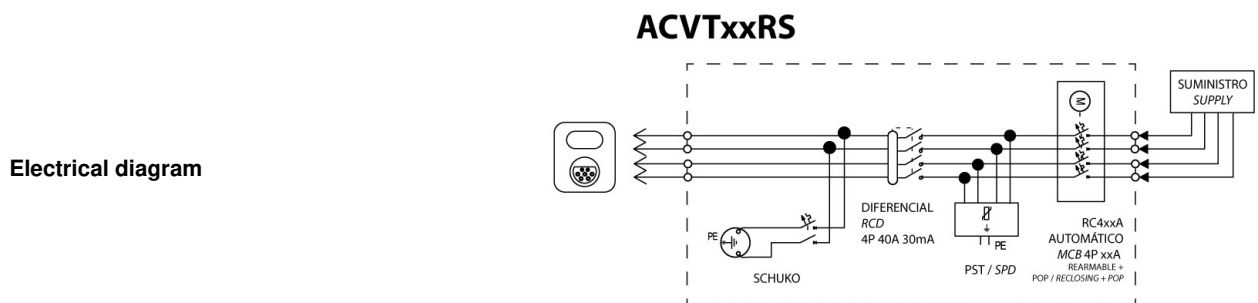

## Dimensions


Product height	286 mm
Product width	418 mm
Product length	148 mm

## Logistic data

Customs code	85371098
--------------	----------

## Connection

---

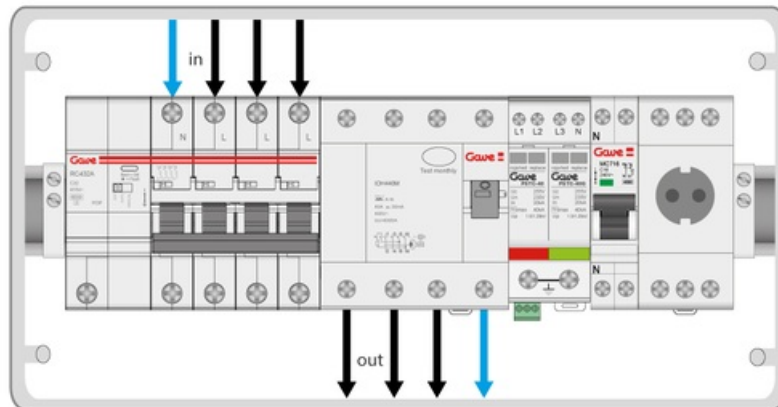

## Dimensions

---

