

## LD562C100

LD CHANGEOVER SWITCH 3P 250A

<b>Code</b>	009LD562C100
<b>EAN</b>	8430892215206

---

## Logistic data

---

Customs code	85365080
ETIM code	EC000216
Package units	1
Package height (mm)	150
Package width (mm)	195
Package length (mm)	280

## Technical data

---


Poles	3
Auxiliary	-
Operational rating (I <sub>e</sub> )	250 A
Thermal rating (I <sub>th</sub> )	250 A
Wire section flexible	120 mm <sup>2</sup>
Connection screws	M8

### Terminal



Max. fuse protection (gG/aM)	250 A (415 V)
	250 A (500 V)
Conditional shortcircuit current (I <sub>cc</sub> )	8 kA (415 V)
	8 kA (500 V)
Insulating voltage (V~)	690
Insulating voltage (V...)	600
Dummy AC-21A	75 kW (3x230 V)
	132 kW (3x415 V)
	160 kW (3x500 V)
Mixed load AC-22A	75 kW (3x230 V)
	132 kW (3x415 V)
	132 kW (3x500 V)
Motor load AC-23A	75 kW (3x230 V)
	110 kW (3x415 V)
Standard	IEC 60947-3

## Connection

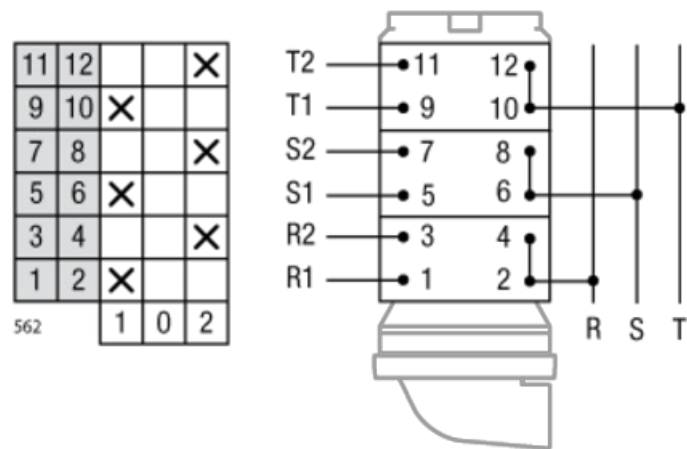

## Dimensions

